

Fig. 248

11) Install sunroof trim, pillar trim, rear quarter trim etc.
12) Check the following items after assembling all parts;

- Garnish must be free from waves.
- When sun roof is fully closed, must be no clearance between garnish and sun roof trim.
- Sun roof must be free from slack and noise when it is fully opened and closed.

9) Install roof trim.

10) Install garnish.

Place garnish joint at rear center of body.

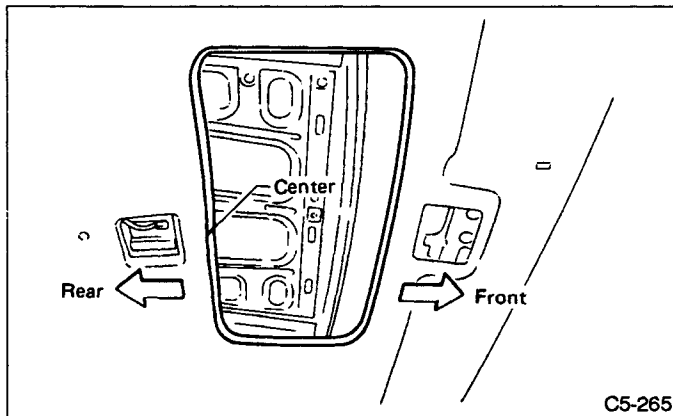


Fig. 249