


## How to remove the headlights on the Subaru SVX (92 – 97)

- 1) Remove the screw that is visible (shown at right in circle) when the hood is up. Slide the signal forward out of the guide hole and unplug the connector. Once the signal and grille are out, the two bolts on each side of the headlight will be visible.




- \*\*\*\* Be sure that the guide pin (shown below), goes into the hole in the fender when you reinstall the signal.

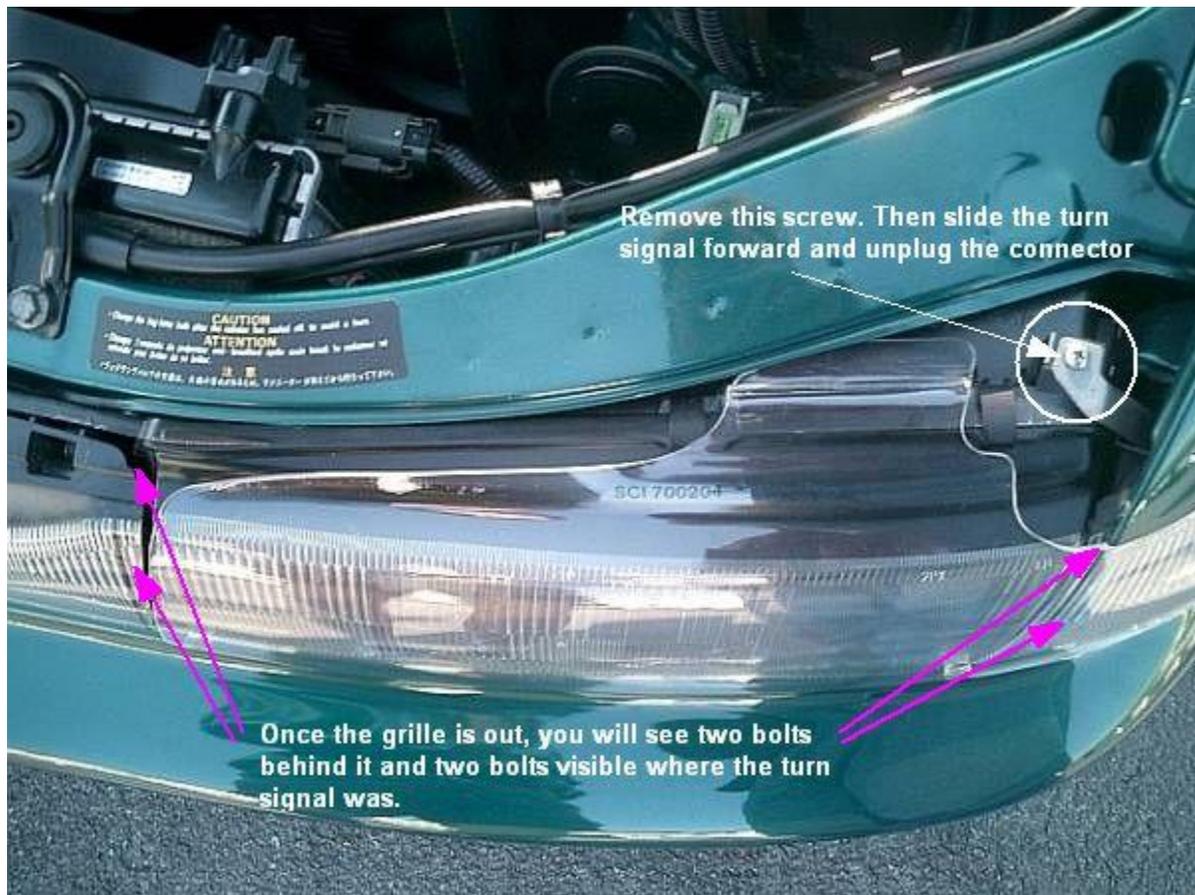

3) The two bolts hidden by the grille are shown below.



4) The two bolts that are hidden by the turn signal are shown below.

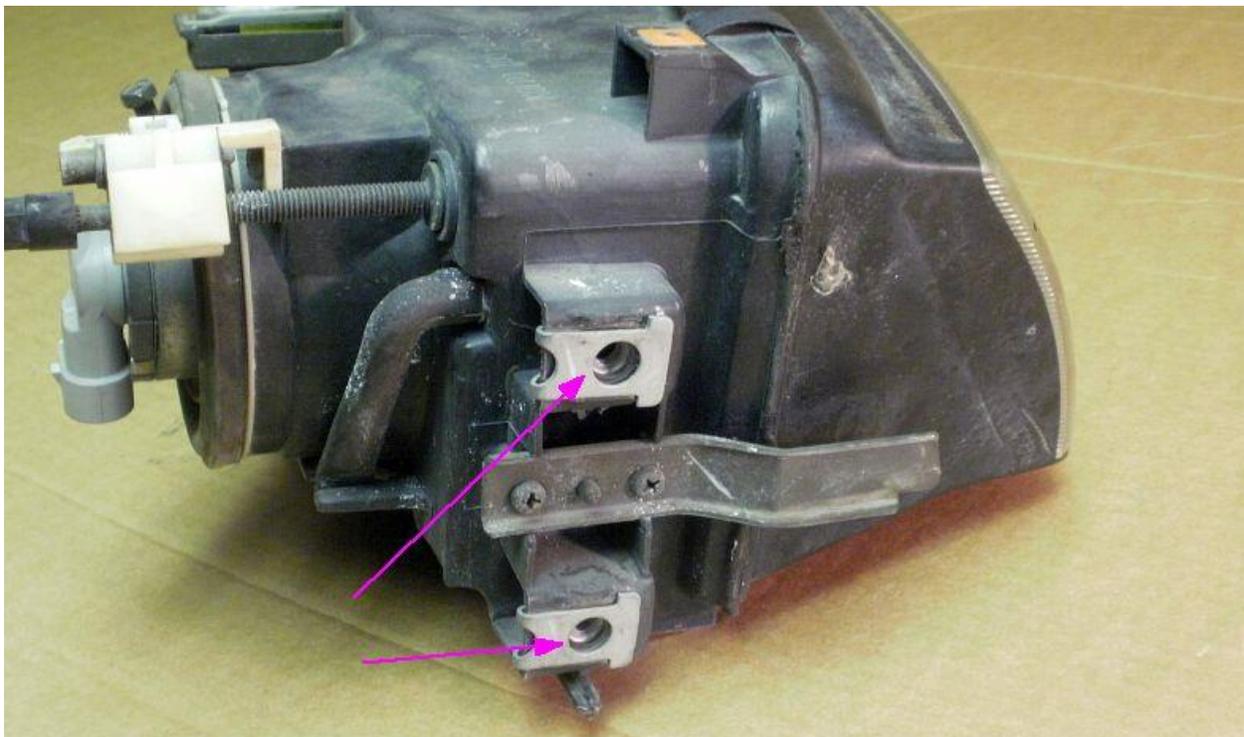

5) Reinstall in the opposite order.