



lift and remove the rear seat cushion.

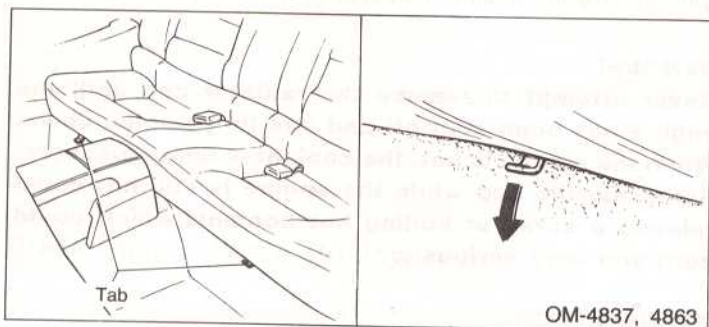

(2) Insert the hexagonal wrench (provided on the bottom surface of the center console) into the side panel hole and slowly turn the wrench clockwise until the shoulder belt anchor locks at the rear end.

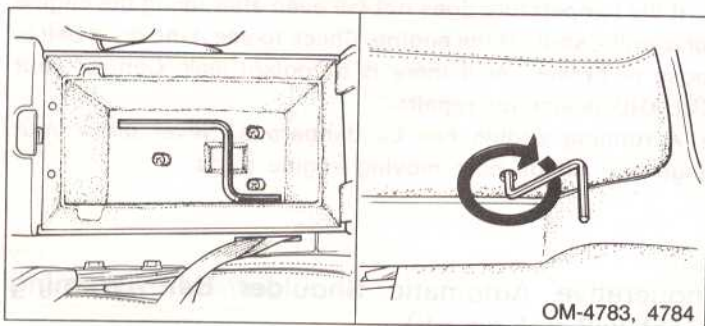

NOTE:

When moving the shoulder belt slide anchor, keep the door on the inoperative side open. Otherwise, the belt that has been moved to the rear position may slide forward when the door is opened.

(3) Reinstall the rear seat cushion and return the hexagonal wrench to its storage area in the center console.

(4) Unlatch the emergency release shoulder belt buckle and refasten it after you sit in the seat.