


Removal of door handle


After you have removed the door panel locate, insure that the window is in the closed position. The door handle power plug at the bottom of the door needs to be disconnected.




Remove the power cable from the retaining clip just below door handle.

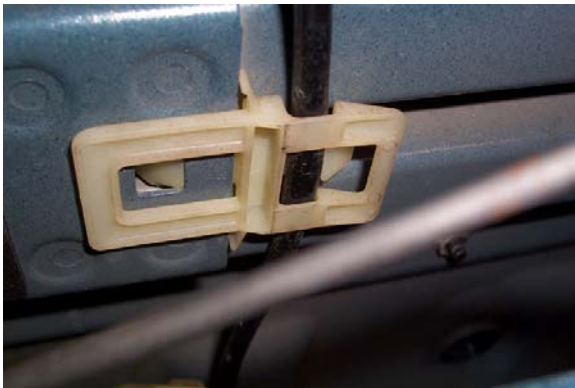

Release the green (lock) and yellow (latch) rod clips from the handle.

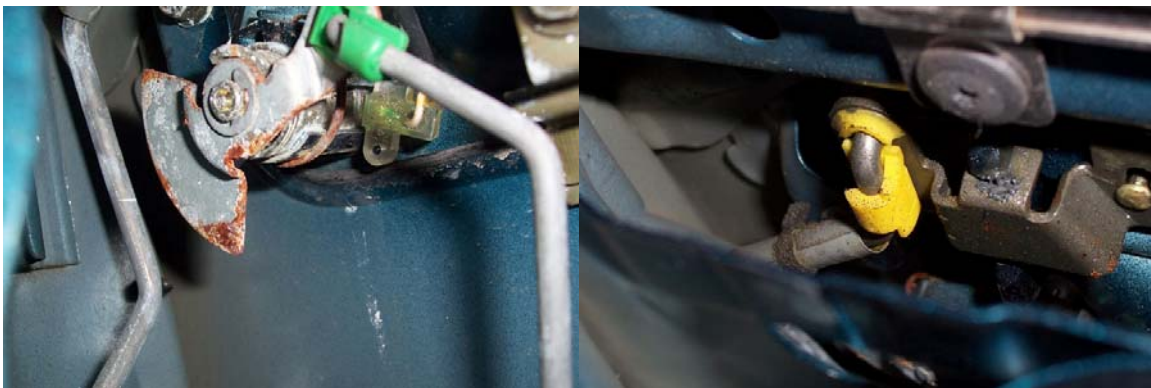

Remove the two 10mm bolts at the 9 and 3 O'clock positions along with the two screw at the 5 and 7 O'clock positions.

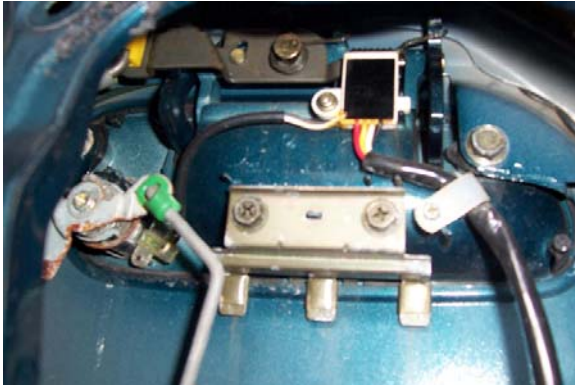

The door handle can be removed now. Be careful not to damage the wires.

To install follow the direction in reverse.